

Assembly #1 - Toe Assembly
2078 x 100 x 550 (1)


Parts Within Cabinet


5	80	467	Sleeper	16mm Packing Sheet
5	80	467	Top Sleeper	16mm Packing Sheet
1	100	2038	Front Toe	16mm Packing Sheet
1	2078	120	Front Kick Face	18mm Satin MDF
1	100	2038	Back Toe	16mm Packing Sheet

.



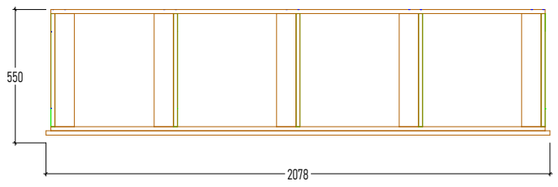

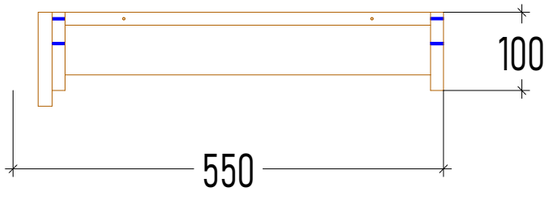

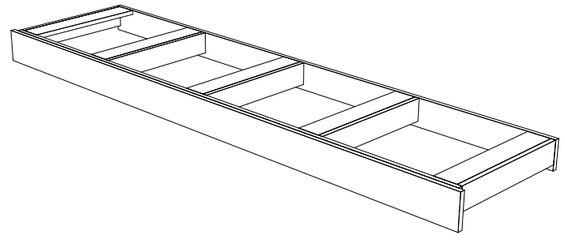

Top Reveal = 0

LHS Reveal = 2 RHS Reveal = 2

Bot Reveal = 0

Hor Reveal = 0

Vert Reveal = 2

J1093 - 62 Florizel Street - Hallway Laundry-Linen


Hallway Laundry & Linen) - Wall #3


Date: 28/09/26


Assembly #2 - Tall Filler to Kick
20 x 2270 x 570 (1)

Parts Within Cabinet

1	60	2270	Filler	18mm Satin MDF









Top Reveal = 0

LHS Reveal = 2 RHS Reveal = 0

Bot Reveal = 0

J1093 - 62 Florizel Street - Hallway Laundry-Linen

Hor Reveal = 0

Vert Reveal = 2

Hallway Laundry & Linen) - Wall #3

Date: 28/09/26

Assembly #3 - STD TALL 2 DOOR 1 INNER DRAWER
858 x 2270 x 560 (1)

Doors

2	427	2270	Sussex Profile	18mm Satin MDF

Parts Within Cabinet

1	544	2238	Left End	16mm HMR White
1	544	2238	Right End	16mm HMR White
1	858	2238	Unfinished Back	16mm HMR White
1	560	858	Top	16mm HMR White
1	560	858	Bottom	16mm HMR White
4	50	250	Side Packer	16mm HMR White
4	534	824	Adjustable Shelf	16mm HMR White
1	510	826	Fixed Shelf	16mm HMR White
2	510	261	Partition	16mm HMR White

Handles

2	1040 OFFSET - 992mm C - Brave - Matt White

Hinges


4	110 Deg Blum Hinge
4	110 Deg Blum Inline


Hinges Plates


8	Std Inline Hinge Plate


Hardware

2	Door Pull	1040 OFFSET - 992mm C - Bra	1040
4	Hinge	110 Deg Blum Hinge	47
8	Hinge Plate	Std Inline Hinge Plate	19.5(
4	Hinge	110 Deg Blum Inline	47

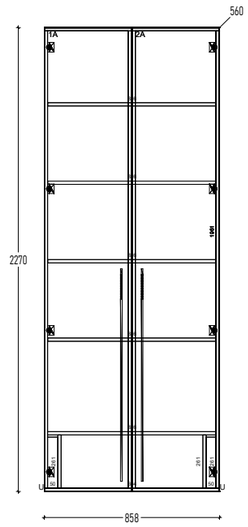

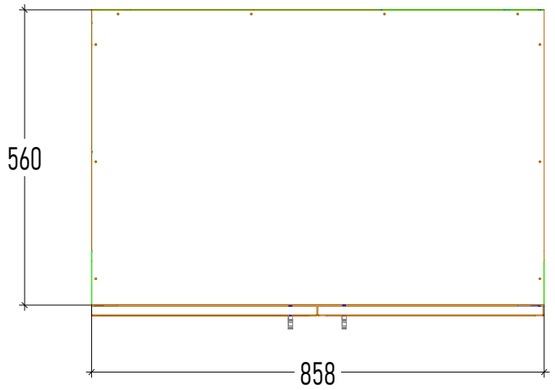

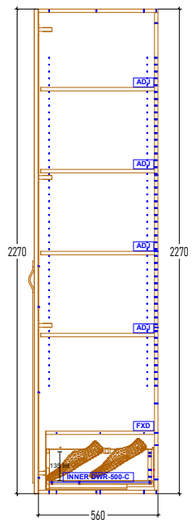

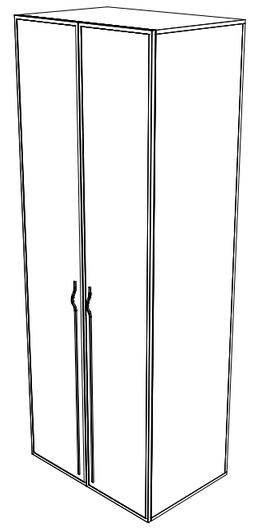

Top Reveal = 0

LHS Reveal = 0 RHS Reveal = 2

Bot Reveal = 0

Hor Reveal = 0

Vert Reveal = 2

J1093 - 62 Florizel Street - Hallway Laundry-Linen

Hallway Laundry & Linen) - Wall #3

Date: 28/09/26

Assembly #3.1 - SINGLE BASE OPEN 1 INNER DRAWER
694 x 200 x 510 (1)

Parts Within Cabinet

1	659	490	3.1 Roll Out Bottom	16mm HMR White
1	147	656	3.1 Roll Out Back	16mm HMR White

Drawers


1 P LBox Wte Bmn 70 Cx500


Miscellaneous


2	3.1 White	White
1	3.1 LBox Gallery	MATERIAL NOT ASSIGNED
4	3.1 Gray	Gray
2	Legrabox Bmn 70kg	LBox DG Bmn 70Kg 500
2	Legrabox Drw Side	LBox Side Wte C 500
2	Legrabox Back Brkt	LBox Back Brkt Wte C
2	Legrabox Inner Front Brkt	LBox Inner Brkt Wte Cg
1	Legrabox Front Piece	LBox Inner Fnt Ng Wte
1	Legrabox Cross Gallery Rail	LBox Cross Gallery Wte


Hardware

1	Drawer Box Base Bracket	Blum Drawer Base Support	20
1 P	Roll Out Guide	LBox Wte Bmn 70 Cx500	500

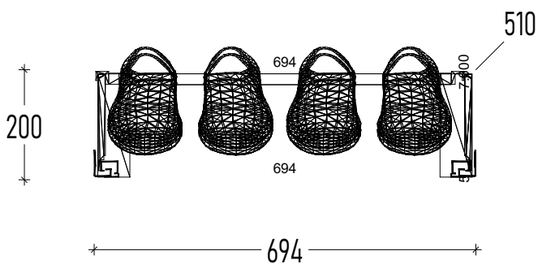

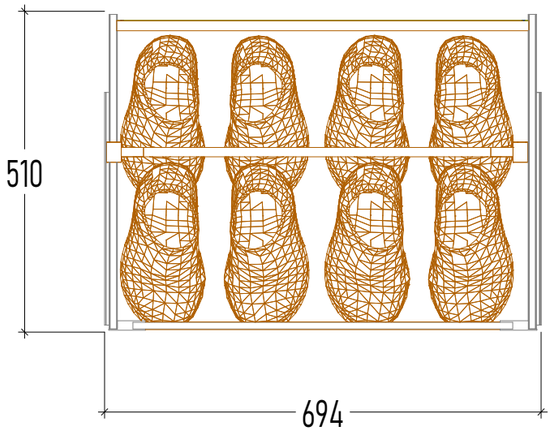

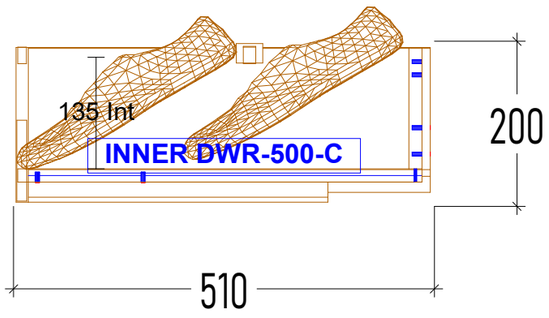

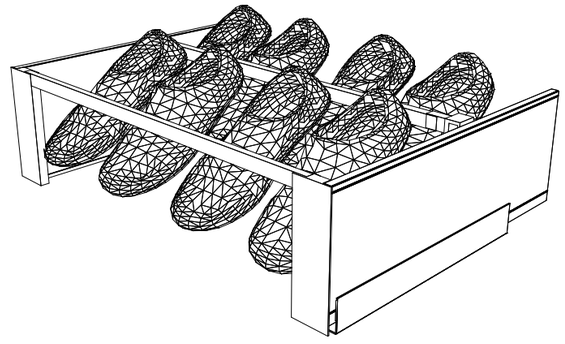

Top Reveal = 3

LHS Reveal = 2 RHS Reveal = 2

Bot Reveal = 0

Hor Reveal = 2

Vert Reveal = 2

J1093 - 62 Florizel Street - Hallway Laundry-Linen

Hallway Laundry & Linen) - Wall #3

Date: 28/09/26

Assembly #4 - Std Base 2 Drawer
1180 x 293 x 560 (1)

Drawer Fronts

2	589	290	Sussex Profile	18mm Satin MDF

Parts Within Cabinet

1	544	245	Left End	16mm HMR White
1	544	245	Right End	16mm HMR White
1	1180	245	Unfinished Back	16mm HMR White
1	560	1180	Top	16mm HMR White
1	560	1180	Bottom	16mm HMR White
1	540	1180	Bottom	16mm HMR White
2	544	245	Partition	16mm HMR White
1	523	490	Drawer Box Bottom 1	16mm HMR White
1	148	520	Drawer Box Back 1	16mm HMR White
1	523	490	Drawer Box Bottom 2	16mm HMR White
1	148	520	Drawer Box Back 2	16mm HMR White

Drawers


2 P	LBox Wte Bmn 40 Cx500	


Miscellaneous


4	Legrabox Bmn 40kg	LBox DG Bmn 40Kg 500
4	Legrabox Drw Side	LBox Side Wte C 500
8	Legrabox Front Brkt	LBox Fnt Brkt M Exp
4	Legrabox Back Brkt	LBox Back Brkt Wte C


Hardware

2 P Drawer Guide	LBox Wte Bmn 40 Cx500	500

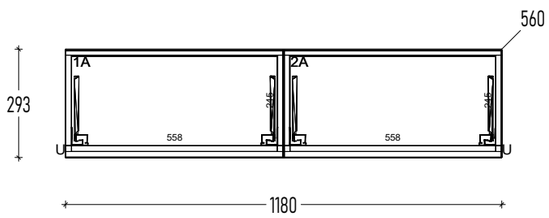

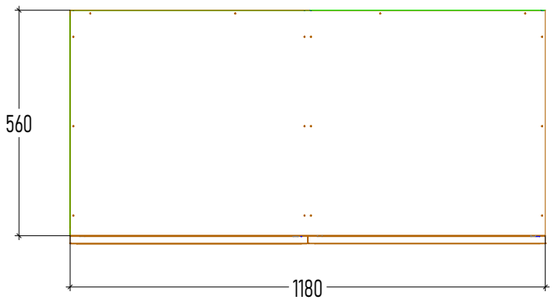

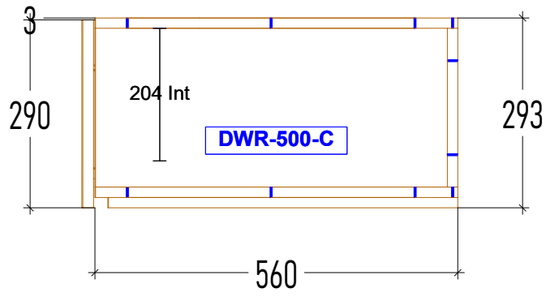

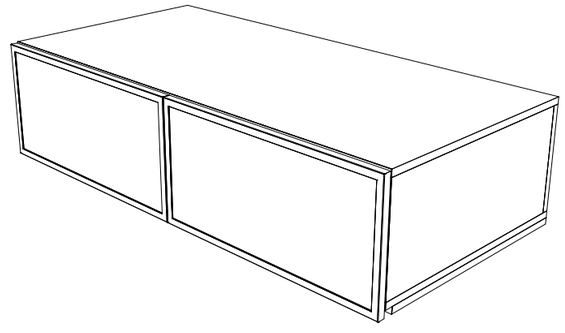

Top Reveal = 3

LHS Reveal = 0 RHS Reveal = 0

Bot Reveal = 0

Hor Reveal = 2

Vert Reveal = 2

J1093 - 62 Florizel Street - Hallway Laundry-Linen


Hallway Laundry & Linen) - Wall #3


Date: 28/09/26


Assembly #5 - Base Filler on kick
20 x 293 x 570 (1)


Parts Within Cabinet

1	60	293	Filler	18mm Satin MDF

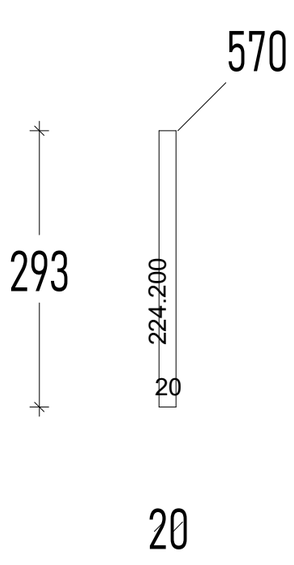



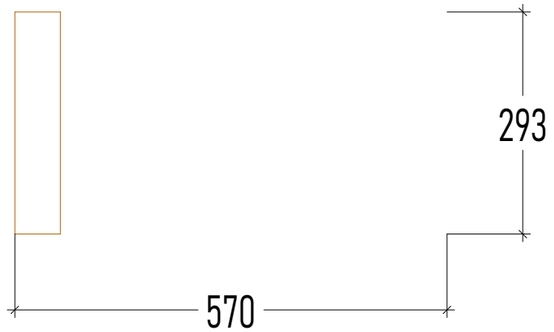

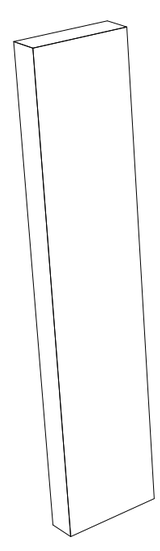

Top Reveal = 3

LHS Reveal = 2 RHS Reveal = 2

Bot Reveal = 0

J1093 - 62 Florizel Street - Hallway Laundry-Linen

Hor Reveal = 2

Vert Reveal = 2


Hallway Laundry & Linen) - Wall #3


Date: 28/09/26

Assembly #6 - RHS - Top L Shape Shadowline
878 x 20 x 570 (1)


Parts Within Cabinet

1	570	878	Top Shadow	18mm Satin MDF



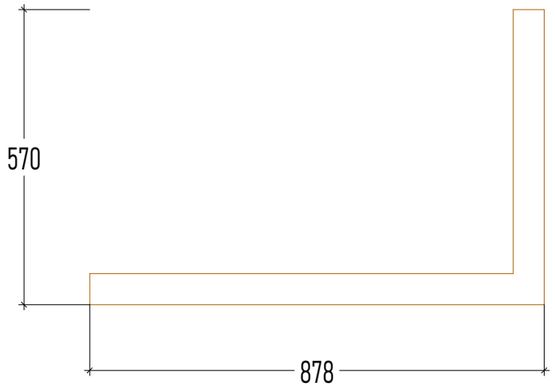



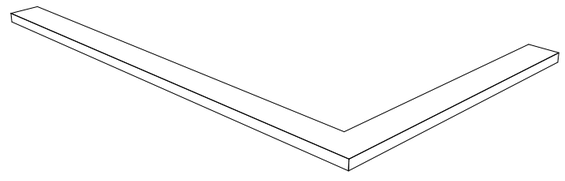

Top Reveal = 0

LHS Reveal = 2 RHS Reveal = 1

Bot Reveal = 0

Hor Reveal = 0

Vert Reveal = 2

J1093 - 62 Florizel Street - Hallway Laundry-Linen


Hallway Laundry & Linen) - Wall #3


Date: 28/09/26


Assembly #7 - Top Shadowline
1200 x 20 x 570 (1)


Parts Within Cabinet

1	60	1200	Top Shadow	18mm Polytec Florentine Walnut Woodma

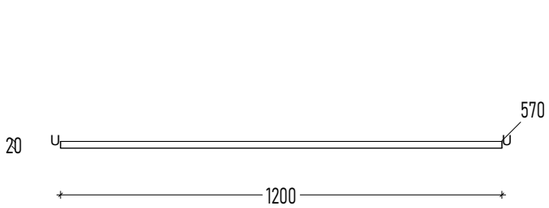

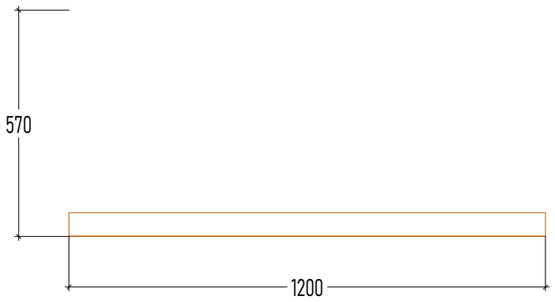

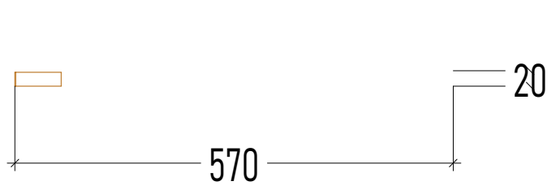

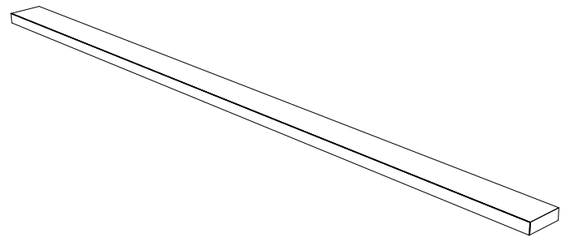

Top Reveal = 0

LHS Reveal = 1 RHS Reveal = 2

Bot Reveal = 0

Hor Reveal = 0

Vert Reveal = 2

J1093 - 62 Florizel Street - Hallway Laundry-Linen


Hallway Laundry & Linen) - Wall #3


Date: 28/09/26


Assembly #8 - WALL OPEN
1180 x 1977 x 580 (1)


Parts Within Cabinet

1	580	1913	Left End	32mm Polytec Florentine Walnut Woodma
1	580	1913	Right End	32mm Polytec Florentine Walnut Woodma
1	1116	1913	Unfinished Back	18mm Polytec Florentine Walnut Woodma
1	580	1180	Top	32mm Polytec Florentine Walnut Woodma
1	580	1180	Bottom	32mm Polytec Florentine Walnut Woodma

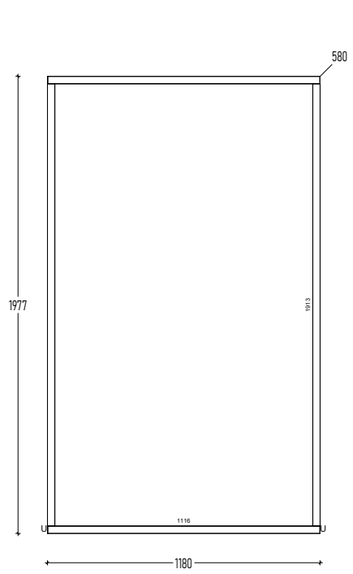

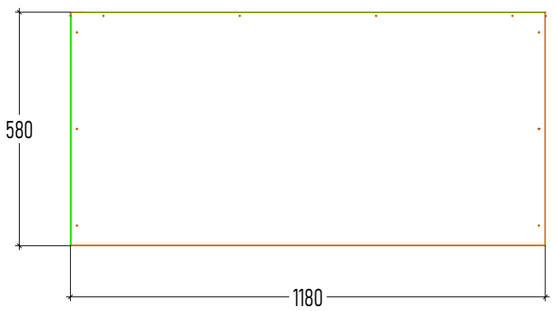

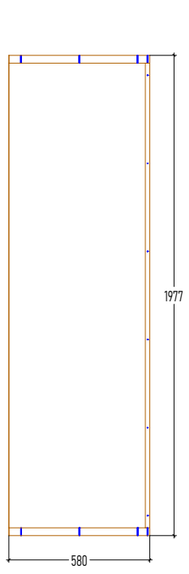

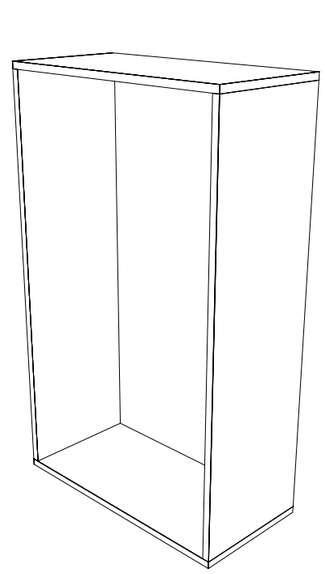

Top Reveal = 0

LHS Reveal = 0 RHS Reveal = 2

Bot Reveal = 0

Hor Reveal = 0

Vert Reveal = 2

J1093 - 62 Florizel Street - Hallway Laundry-Linen


Hallway Laundry & Linen) - Wall #3


Date: 28/09/26

Assembly #9 - Upper Filler
20 x 1977 x 570 (1)

Parts Within Cabinet

1	60	1977	Filler	18mm Polytec Florentine Walnut Woodma	Cut width to 20mm

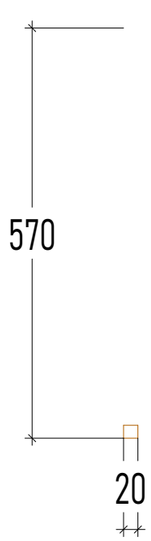

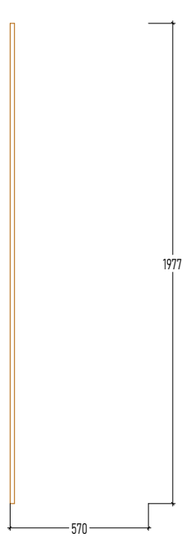



Top Reveal = 0

LHS Reveal = 1 RHS Reveal = 2

Bot Reveal = 0

Hor Reveal = 0

Vert Reveal = 2

J1093 - 62 Florizel Street - Hallway Laundry-Linen

Hallway Laundry & Linen) - Wall #3

Date: 28/09/26


Assembly #10 - Toe Assembly
2655 x 100 x 680 (1)


Parts Within Cabinet


6	80	597	Sleeper	16mm Packing Sheet
6	80	597	Top Sleeper	16mm Packing Sheet
1	100	2615	Front Toe	16mm Packing Sheet
1	2655	120	Front Kick Face	18mm Satin MDF
1	100	2615	Back Toe	16mm Packing Sheet

.



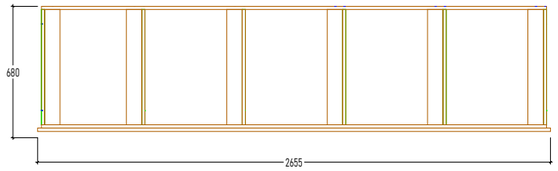

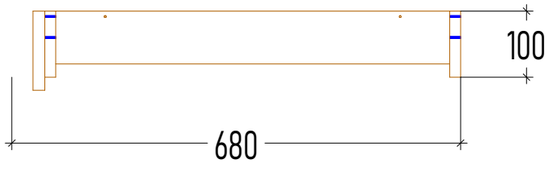

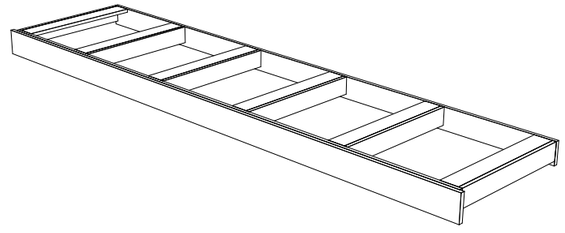

Top Reveal = 0

LHS Reveal = 2 RHS Reveal = 2

Bot Reveal = 0

Hor Reveal = 0

Vert Reveal = 2

J1093 - 62 Florizel Street - Hallway Laundry-Linen


Hallway Laundry & Linen) - Wall #10


Date: 28/09/26


Assembly #11 - Tall Filler to Kick
20 x 2260 x 680 (1)

Parts Within Cabinet

1	60	2260	Filler	18mm Satin MDF





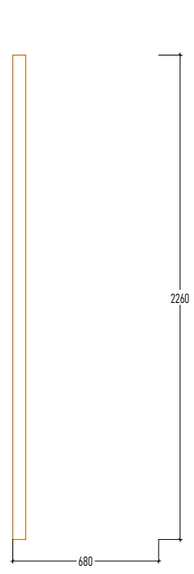



Top Reveal = 0

LHS Reveal = 2 RHS Reveal = 1

Bot Reveal = 0

J1093 - 62 Florizel Street - Hallway Laundry-Linen

Hor Reveal = 0

Vert Reveal = 2

Hallway Laundry & Linen) - Wall #10

Date: 28/09/26

Assembly #12 - Std Tall 2 Door
871 x 2260 x 680 (1)

Doors

2	434	2260	Sussex Profile	18mm Satin MDF

Parts Within Cabinet

1	680	2228	Left End	16mm HMR White
1	680	2228	Right End	16mm HMR White
1	839	1334	Unfinished Back	16mm HMR White
1	680	871	Top	16mm HMR White
1	680	871	Bottom	16mm HMR White
1	839	500	Switchboard backing	16mm HMR White
1	839	378	Switchboard backing	16mm HMR White
1	510	839	Fixed Shelf	16mm HMR White
1	644	839	Fixed Shelf	16mm HMR White
2	100	500	Partition	16mm HMR White
3	654	837	Adjustable Shelf	16mm HMR White

Handles

2	1040 OFFSET - 992mm C - Brave - Matt White

Hinges

8	110 Deg Blum Hinge

Hinges Plates


8	Std Inline Hinge Plate


Miscellaneous


1	Switchboard	White


Hardware

2	Door Pull	1040 OFFSET - 992mm C - Bra 1040
8	Hinge	110 Deg Blum Hinge 47
8	Hinge Plate	Std Inline Hinge Plate 19.5(

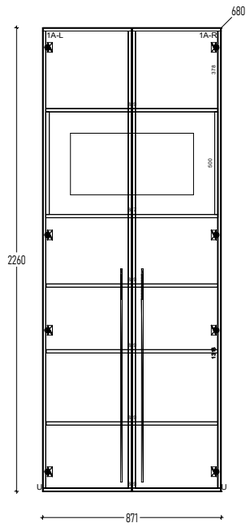

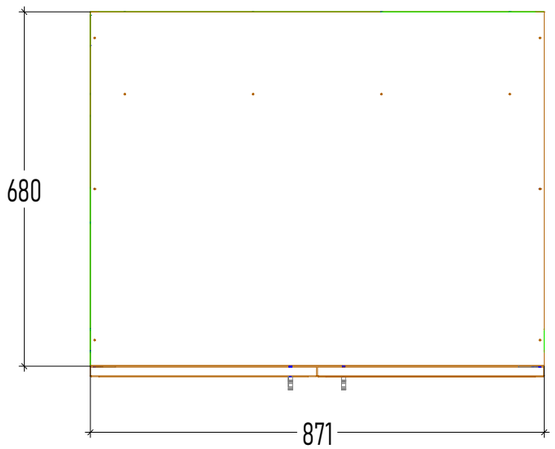

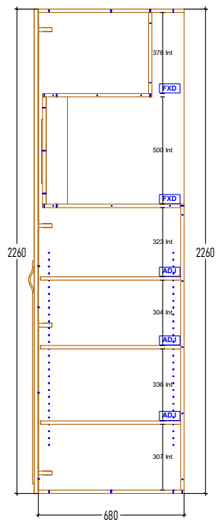

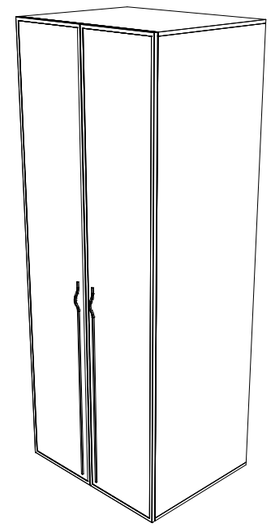

Top Reveal = 0

LHS Reveal = 0 RHS Reveal = 1

Bot Reveal = 0

Hor Reveal = 0

Vert Reveal = 2

J1093 - 62 Florizel Street - Hallway Laundry-Linen

Hallway Laundry & Linen) - Wall #10

Date: 28/09/26

Assembly #13 - Std Tall 2 Door
872 x 2260 x 680 (1)

Doors

2	434	2260	Sussex Profile	18mm Satin MDF

Parts Within Cabinet

1	664	2228	Left End	16mm HMR White
1	664	2228	Right End	16mm HMR White
1	872	2228	Unfinished Back	16mm HMR White
1	680	872	Top	16mm HMR White
1	680	872	Bottom	16mm HMR White
5	654	838	Adjustable Shelf	16mm HMR White

Handles

2	1040 OFFSET - 992mm C - Brave - Matt White

Hinges


8	110 Deg Blum Hinge


Hinges Plates


8	Std Inline Hinge Plate


Hardware

2	Door Pull	1040 OFFSET - 992mm C - Bra	1040
8	Hinge	110 Deg Blum Hinge	47
8	Hinge Plate	Std Inline Hinge Plate	19.5(

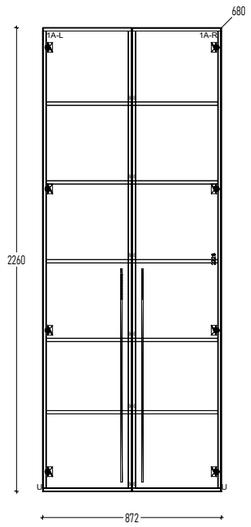

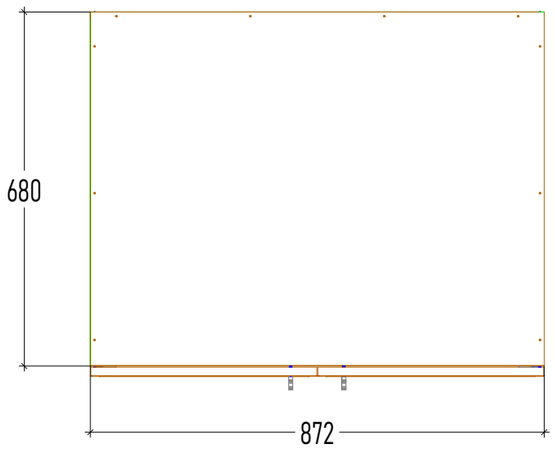

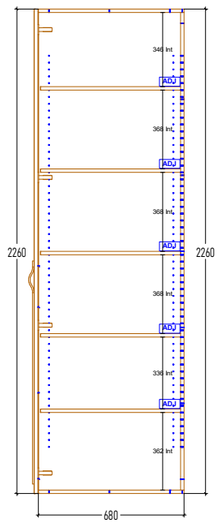

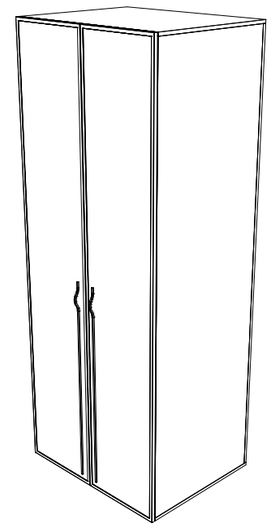

Top Reveal = 0

LHS Reveal = 1 RHS Reveal = 1

Bot Reveal = 0

Hor Reveal = 0

Vert Reveal = 2

J1093 - 62 Florizel Street - Hallway Laundry-Linen

Hallway Laundry & Linen) - Wall #10

Date: 28/09/26

Assembly #14 - Std Tall 2 Door
872 x 2260 x 680 (1)

Doors

2	434.500	2260	Sussex Profile	18mm Satin MDF

Parts Within Cabinet

1	664	2228	Left End	16mm HMR White
1	664	2228	Right End	16mm HMR White
1	872	2228	Unfinished Back	16mm HMR White
1	680	872	Top	16mm HMR White
1	680	872	Bottom	16mm HMR White
1	664	840	Fixed Shelf	16mm HMR White

Handles

2	1040 OFFSET - 992mm C - Brave - Matt White

Hinges

8	110 Deg Blum Hinge

Hinges Plates


8	Std Inline Hinge Plate


Miscellaneous

2	Oval Hanging Rail	Hanging Rail - Oval - White	Cut to 830mm

Hardware

2	Door Pull	1040 OFFSET - 992mm C - Bra 1040
8	Hinge	110 Deg Blum Hinge 47
8	Hinge Plate	Std Inline Hinge Plate 19.5(

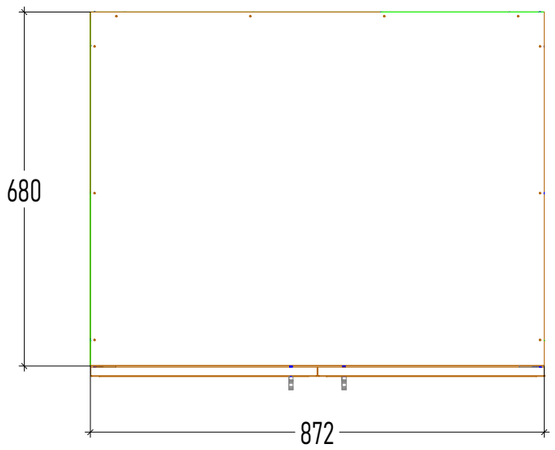

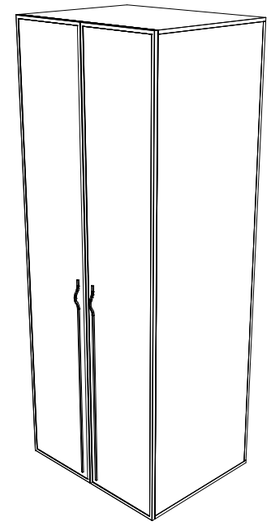

Top Reveal = 0

LHS Reveal = 1 RHS Reveal = 0

Bot Reveal = 0

Hor Reveal = 0

Vert Reveal = 2

J1093 - 62 Florizel Street - Hallway Laundry-Linen


Hallway Laundry & Linen) - Wall #10


Date: 28/09/26


Assembly #15 - Tall Filler to Kick
20 x 2260 x 680 (1)

Parts Within Cabinet

1	60	2260	Filler	18mm Satin MDF





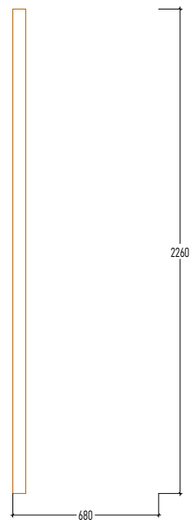



Top Reveal = 0

LHS Reveal = 1 RHS Reveal = 2

Bot Reveal = 0

Hor Reveal = 0

Vert Reveal = 2

J1093 - 62 Florizel Street - Hallway Laundry-Linen


Hallway Laundry & Linen) - Wall #10


Date: 28/09/26

Assembly #16 - Top Shadowline
2655 x 20 x 680 (1)


Parts Within Cabinet

1	60	2655	Top Shadow	18mm Satin MDF



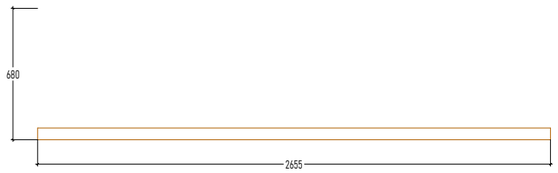



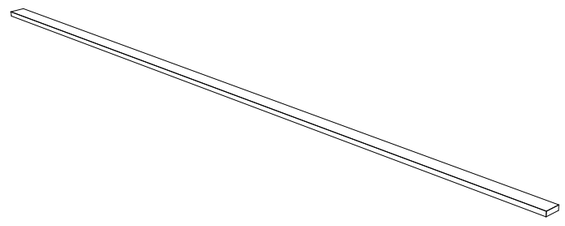

Top Reveal = 0

LHS Reveal = 2 RHS Reveal = 2

Bot Reveal = 0

Hor Reveal = 0

Vert Reveal = 2

J1093 - 62 Florizel Street - Hallway Laundry-Linen

Hallway Laundry & Linen) - Wall #10

Date: 28/09/26